


1) Sluice / Gate Valve.

Type: Non-Rising Stem (ISI Mark) & Rising Stem.
 Standard: IS-14846/2000, IS-780/2906, BS-1735, BS-5150, BS-1414/ API 600, IS-10611, IS-778.
 MOC: Cast Iron, SG Iron, Cast Steel, Forged Steel, Stainless Steel, Gun Metal.
 Ends: Flanged, Screwed, Socket Welded.
 Class/ Pr. Rating: PN-1.0, 1.6, 125#, 150#, 300#, 600#, 800#.
 Size: 15mm- 1200mm.
 Service: Water, Air, Oil, Gas, Chemical & Acid.
 Operation: Hand wheel, Gear, Electric Actuator, Pneumatic Actuator.



2) Check / Non-Return Valve with ISI Mark.

Type: Swing, Lift, Ball & Wafer, Duel Plate, Multi Door.
 Standard: IS-5312, Part-1 & Part-2, BS-5153, BS-1868 API-6D, API-594.
 MOC: Cast Iron, SG Iron, Cast Steel, Forged Steel, Stainless Steel, Gun Metal.
 Seat: Rubber, Metal.
 Ends: Flanged, Screwed, Socket Welded, Wafer (Flange less).
 Class/ Pr. Rating: PN-1.0, 1.6, 125#, 150#, 300#, 600#, 800#.
 Size: 15mm- 1200mm.
 Operation: Counter Weight, Dashpot (Air Cushion), Spring.
 Optional: By-Pass Arrangement.

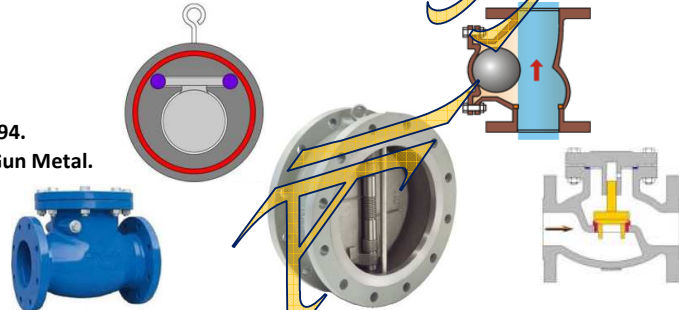

3) Globe Valve.

Type: Rising, Straight & Right Angle.
 Standard: IS-9338, BS-1873, BS-5152, BS-1873, IS-10605.
 MOC: Cast Iron, SG Iron, Cast Steel, Forged Steel, Stainless Steel, Gun Metal.
 Ends: Flanged, Screwed, Socket Welded.
 Class/ Pr. Rating: PN-1.0, 1.6, 125#, 150#, 300#, 600#, 800#.
 Size: 15mm- 800mm.
 Operation: Hand wheel, Gear, Electric Actuator, Pneumatic Actuator.



4) Butterfly Valve.


Type: Wafer, Double Flange.
 Standard: IS-13095, BS-5155, AWW-AC-504, API-609.
 MOC: Cast Iron, SG Iron, Cast Steel, Stainless Steel.
 Ends: Wafer & Double Flange.
 Class/ Pr. Rating: PN-1.0, 1.6.
 Size: 25mm- 1600mm.
 Operation: Lever, Gear, Electric Actuator, Temper Switch, Pneumatic Actuator.



5) Foot Valve.

Type: Swing, Lift, Double Flap & Ball.
 Standard: IS-4038.
 MOC: Cast Iron, SG Iron, Cast Steel, Stainless Steel, MS Fabricated, GM.

Disc: Rubber, Metal to Metal.
 Ends: Flange
 Size: 25mm- 600mm.

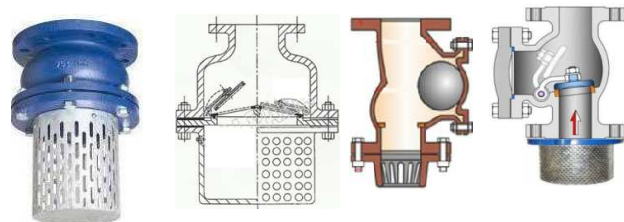

6) Air Release Valve.

Type: Single Acting, Double Acting.
 Standard: IS-14845/2000, GK Catalogue.
 MOC: Cast Iron, Cast Steel, Stainless Steel.
 Ends: Screwed & Flange.
 Class/ Pr. Rating: PN-1.0, 1.6.
 Size: 15mm- 500mm.



7) Spring Loaded Pressure Relief & Reducing Valve..

Type: Right Angle, Straight.

Standard:

MOC: Cast Iron, Cast Steel, Stainless Steel, Forged Steel, GM.

Ends: Double Flange, Screwed, .

Size: 10mm- 400mm.

Operation: Spring, Hand Wheel, Adjustable Nut.



8) Strainer.


Type: "Y", Duplex, Simplex, Basket.

MOC: Cast Iron, Cast Steel, Stainless Steel, MS Fabricated, Brass.

Ends: Double Flange, Screwed.

Strainer Element: SS, Brass.

Size: 15mm- 900mm.

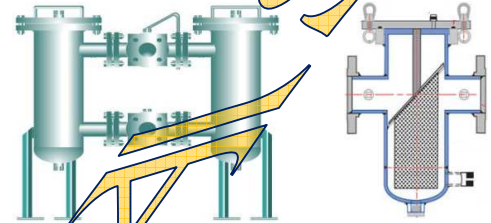

9) Knife Gate (Pulp) Valve & Dual Plate Gate Valve.

Type: Unidirectional, Bidirectional.

Standard: MSS SP 81,

MOC: Cast Iron, Cast Steel, Stainless Steel, MS Fabricated.

Seat: Rubber, Metal.

Ends: Double Flange, Wafer, Lug.

Size: 150mm- 800mm.

Operation: Lever, Hand wheel, Gear, Electric Actuator, Pneumatic Actuator.



10) Fire Hydrant (Landing) Valve..

Type: Single Outlet, Double Outlet.

Standard: IS-5290

MOC: Cast Iron, Cast Steel, Stainless Steel, GM.

Ends Flange.

Size: 40mm- 65mm.

Operation: Hand Wheel.



11) Ball & Float Valve.

Type: Single piece, Multi Piece.

MOC: Cast Iron, Cast Steel, Forged Steel, Stainless Steel, Gun Metal.

Standard:

Ends: Flange, Screwed, Socket Welded.

Class/ Pr. Rating: PN-1.0, 1.6, 125#, 150#, 300#, 600#, 800#, 1500#, 2500#.

Size: 15mm- 200mm.

Operation: Lever, Electric Actuator, Pneumatic Actuator.



12) Plug Valve.

MOC: Cast Iron, Cast Steel, Forged Steel, Stainless Steel, Gun Metal.

Standard: 2Way, 3Way, 4Way.

Ends: Flange, Screwed.

Class/ Pr. Rating: PN-1.0, 1.6, 125#, 150#, 300#.

Size: 15mm- 300mm.

Operation: Hand wheel, Gear, Electric Actuator, Pneumatic Actuator.



13) Diaphragm Valve


Type: Non-Rising, Rubber, Glass & PTFE lining.

MOC: Cast Iron, Cast Steel.

Standard: IS-11791, BS-5156.

Size: 150mm- 300mm.

Operation: Hand wheel, Gear, Electric Actuator, Pneumatic Actuator.



14) Sluice Gate.


Type: Rectangle, Square, Extended Spindle.

MOC: Cast Iron, MS Fabricated.

Standard: IS-3042, IS-13349.

Size: 150mm- 1800mm.

Operation: Head Stock, Hand wheel, Gear, Electric & Pneumatic Actuator.



14) PVC/PP Valves, Flanges & Fittings.

Type: Gate, Diaphragm, "Y" Strainer, Ball Valve, Foot Valve, Flange & Socket.

MOC: PVC & Poly-Propylene.

Size: 150mm- 200mm.

Operation: Hand wheel, Gear, Electric Actuator, Pneumatic Actuator.

Contact Person:

Sourav Koley (Partner)

(M: 9007523242/ 9804775527)

Subhas Engineering Works.

E-Mail: subhasengineeringworks@gmail.com & souravkoley26@gmail.com

SUBHAS ENGINEERING WORKS